


IQ4H Vertical Fall - Throat Metal Detector

Designed for the Food Industry

Product Highlights

- Gravity feed system for inspecting powders, granules or bulk food products
- Supplied complete with frame, throughput tube and choice of sealed valve or cowbell reject devices
- Tivar anti-static food grade throughput tube as standard
- Air failure and dump valve features included
- Four password protected security levels are provided for Operators, Supervisors, Engineering and Administration



Variable Frequency Provides the Best Detection Levels

The IQ4H Vertical Fall is built using LOMA's Variable Frequency technology that allows detection levels to be optimised around a wide range of differing product conditions



Auto Learn Provides Simple and Fast Set-up


The IQ4H Vertical Fall will automatically set-up and store up to 200 different presets, calibrating for product effect and loose material as the product passes through the system.



Best in Class Detection Levels for Magnetic and Non-magnetic Metals

The IQ4H Vertical Fall offers excellent detection levels







7" Colour Touchscreen


Standard across all of the IQ4H range, the 7" touchscreen offers 33% more space than previous generation metal detectors making operations simple.

Technical Specification

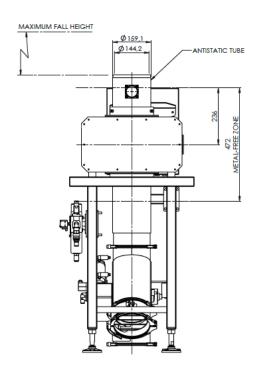

Nominal Diameters Available (mm)	100 (4"), 150 (6"), 200 (8"), 250 (10")		
Material of Construction	304 Brushed stainless steel		
Variable Frequency	31 to 937kHz		
Supply Voltages	110 - 250V AC 50/60Hz		
Power Consumption	20VA		
Temperature Range	-5 to 40°C (23 to 104°F)		
Humidity	0 to 95% Relative Humidity (Non-condensing)		
Environment	IP66		
PVS Enabled	Yes		
Ethernet Capability	Yes		
USB Capability	Yes		

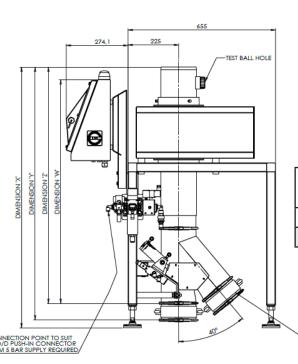



HEIGHT OPTION	DIMENSION 'X'	DIMENSION 'Y'	DIMENSION 'Z'	MAXIMUM FALL HEIGHT	DIMENSION 'W' MIN-MAX
STANDARD	1157	1122.5	1049	800	945 - 995
SHORT	1001	966.5	893	200	785 - 835

Automatic Reject Options

The IQ4H Vertical Fall can be supplied with either of the below reject options:

- Sealed Valve
- Cowbell







2x TEST BALL GRID ADAPTORS

Tel: +44(0)1252 893300 (UK) | +1-800-872-5662 (North America)



♣ automate^{uk}